

MF Series Modular Flake Ice Machines – up to 590kg

MF 56 AS OX Superflake ice



Superflake ice




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 590kg daily production rate
- 37kg storage bin capacity
- Air cooled version
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- XSafe - Natural Sanitation System
- Vertical evaporator spray-system technology
- Front-in and front-out air flow designed for placement in tight spaces
- Ergonomic access to ice with sliding disappearing door
- One touch cleaning for time and labour saving
- Resistant stainless-steel exterior
- Easy access front condenser air filter
- Routine maintenance visible alarm light on front panel
- Includes removable air filter, ice scoop, water and drain hose
- NB 530 with CBT 30 EFSD - 243kg storage capacity
- NB 948 with CBT 48 FMCD - 406kg storage capacity
- UBH 1100 - Upright storage bin - 553kg storage capacity

MF Series Modular Flake Ice Machines – up to 590kg

MF 56 AS OX

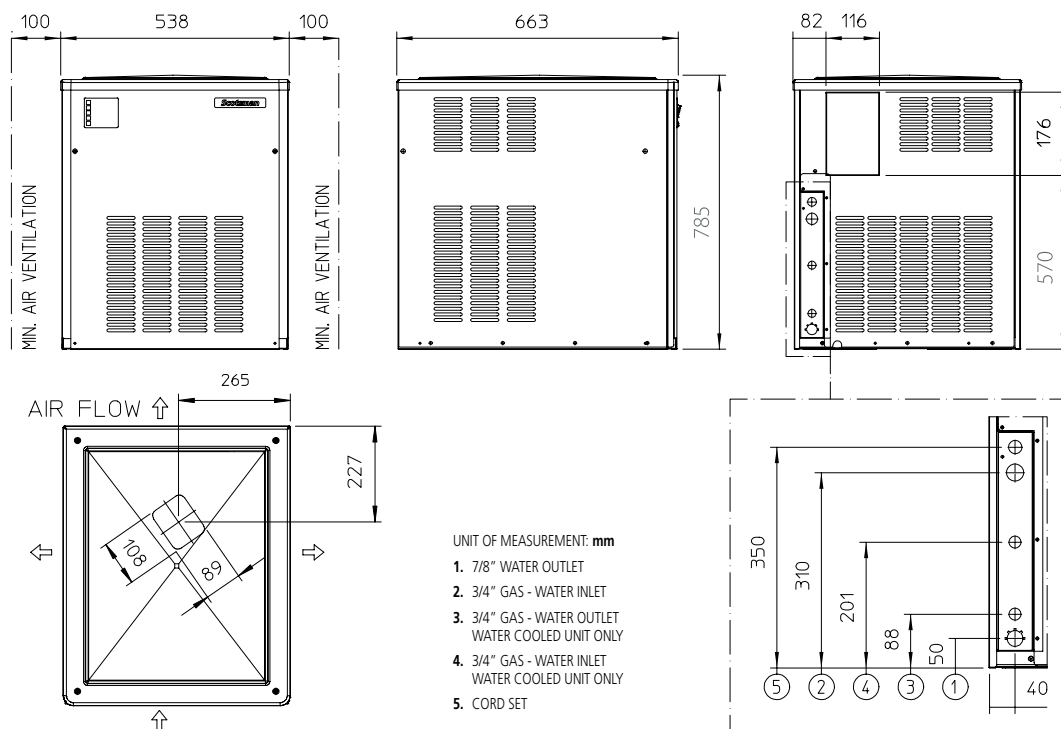

moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production per 24 hours

Ambient temperature / Water temperature

| 10°C / 10°C | 21°C / 10°C | 32°C / 21°C |
|-------------|-------------|-------------|
| 600 | 590 | 520 |

Dimensions

| | |
|----------------|-------|
| Width: | 258mm |
| Depth: | 663mm |
| Height: | 794mm |
| Nett weight: | 94kg |
| Packed weight: | 103kg |

Water consumption

Air cooled version: 217 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 2000W,
15A cordset supplied

| | |
|---------------------|-----------|
| No. Circuit wire: | 3 |
| Compressor: | 5000W |
| Energy consumption: | 45kW/24hr |

Refrigerant type

R404a, R452a

Installation distance from wall

| | |
|------|-------|
| Rear | 100mm |
| Side | 150mm |

Operating requirement air temperature 10-43°C

Water connection requirements

| | |
|--------------------------|------------|
| Inlet connection: | R 3/4" |
| Cold water: | 5-38°C |
| Pressure: | 100-150kPa |
| Water outlet connection: | Ø 3/4" |

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2301