

## EC Series Self Contained Machines – with Progressive Water Discharge – up to 39kg

**ECS 87 AS OX** Small gourmet cube 8g, Ø21mm x 25mm



Small gourmet cube 8g,  
21mm dia x H 25mm




Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 39kg daily production rate
- 19kg storage bin capacity
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- Hydrocarbons R290 refrigerant gas
- XSafe - Natural Sanitation System
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- Resistant stainless steel exterior
- Front access condenser air filter, removable and washable
- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes removable air filter, ice scoop, water and drain hose
- Optional adjustable feet available

## EC Series Self Contained Machines – with Progressive Water Discharge – up to 39kg

### ECS 87 AS OX

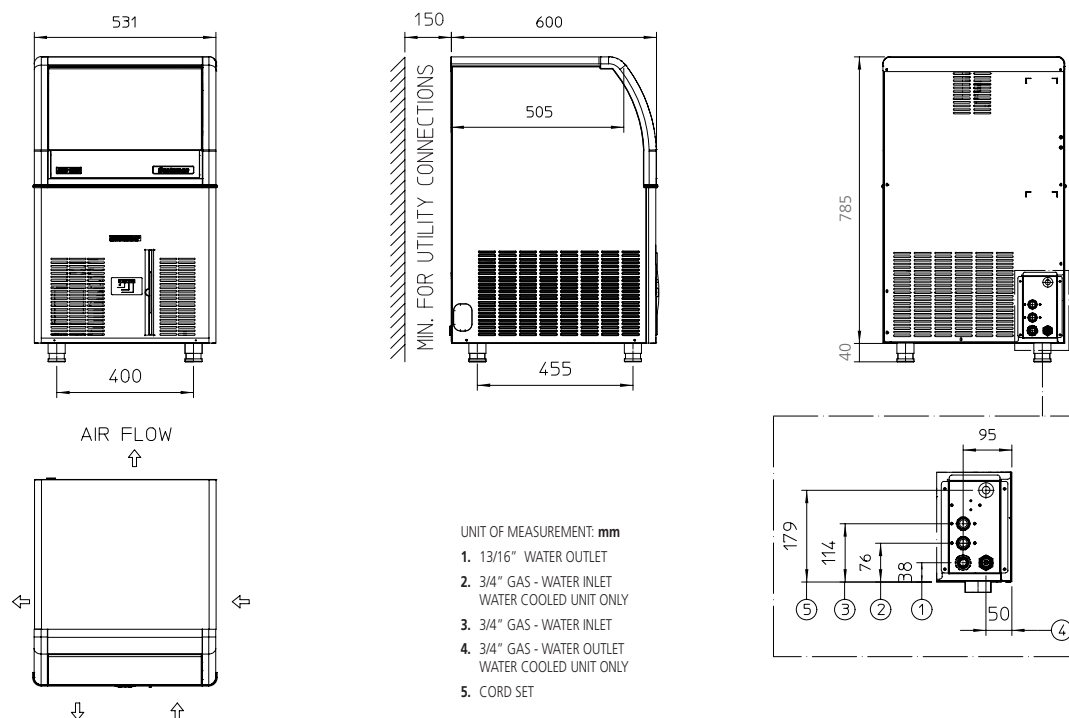

moffat.com.au

**Australia**  
Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

**New South Wales**  
Telephone 02-8833 4111  
nswsales@moffat.com.au

**South Australia**  
Telephone 03-9518 3888  
vsales@moffat.com.au

**Queensland**  
Telephone 07-3630 8600  
qldsales@moffat.com.au

**Western Australia**  
Telephone 08-9413 2400  
wasales@moffat.com.au

#### Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
ECS 87 AS OX	40	39	31

#### Dimensions

Width:	531mm
Depth:	600mm
Height:	825mm (including legs)
Nett weight:	46kg
Packed weight:	53kg

#### Water consumption

Air cooled version: 3.4 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 570W,  
10A cordset supplied

No. Circuit wire:	3
Compressor:	1215W
Energy consumption:	10.8kW/24hr

#### Refrigerant type

R290

#### Installation distance from wall

Rear	150mm
Sides	150mm
Operating requirement air temperature 10-43°C	

#### Water connection requirements

Inlet connection:	R 3/4"
Cold water:	5-38°C
Pressure:	100-500kPa
Water outlet connection:	Ø3/4"

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd  
AN.SM.2201